




# MODERNTECH

## Packer Roller

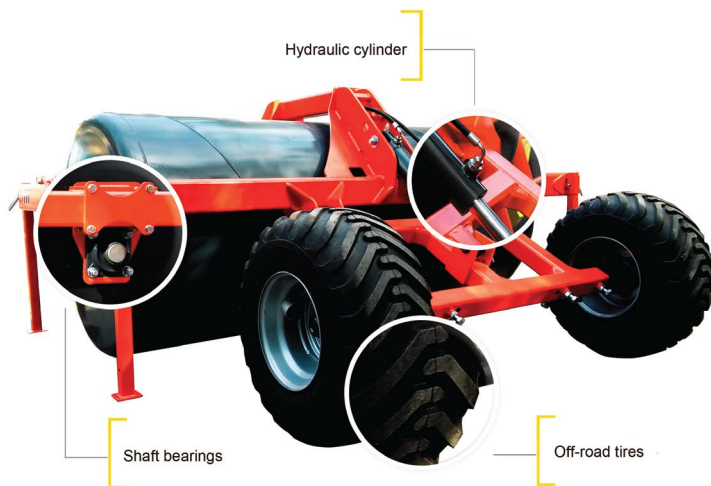

Packer roller is used to thickening of the top layer of ground and rolling shallow sown seeds (beet, carrot and grass). It caused a bigger permeating water which affects speeding up the formation of a fruitful soil microflora and decomposition of organic matter, what has a direct impact on the better plant growth. It is also used to surface role before sowing or planting, to crumple green fertilizer before plowing and to elimination in spring the cracks in the soil, molehills and inequalities after the frost.

Application:



- In the meadows
- Pasture
- Arable land
- Football pitches
- Golf courses

### Technical data:

Model	W-250	W-275	W-300
Shaft diametr	Fi 1220	Fi 1220	Fi 1220
Curb weight	2090	2190	2290
The mass of the roller with water	5040	5415	5790
A - Height[mm]	1400	1400	1400
B - Width[mm] - the total	3150	3425	3650
C - Lenght [mm]	4600	4600	4600
Width[mm] - working	2500	2750	3000
Transport speed	30	30	30

Diametr [mm]	Pressure [kg]	
	Without water load	With water load
1220	850	2020

Possible to get pressure on the meter working width of the machine.

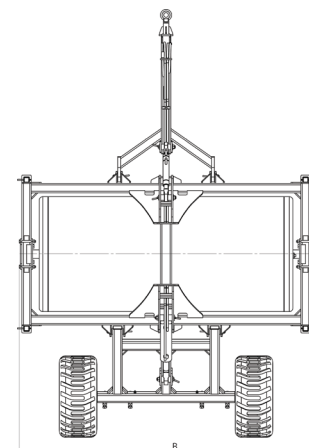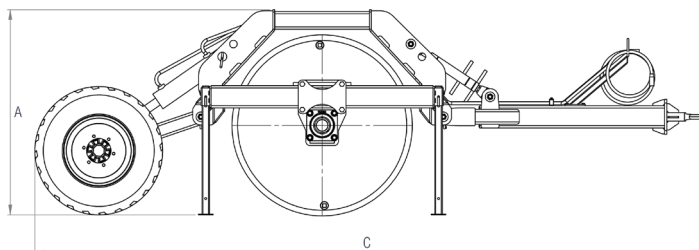

### Equipment:

#### Standard equipment:

- Drawbar transport regulate by central bolt
- Rotating towing (max 12 ton)
- Off-road tires
- Support feet

#### Additional equipment:

- Lighting (end-outline marker lamps, lamps)
- Special Tyres (Flotation Starco, Alliance)
- Other roller diameters